

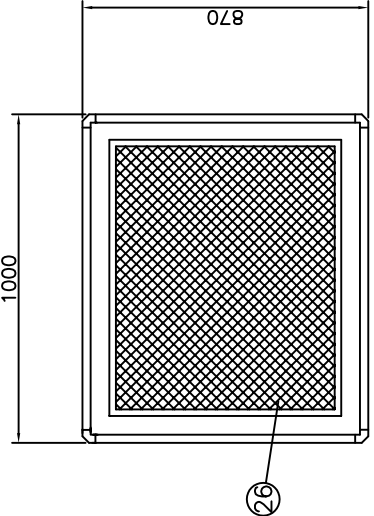


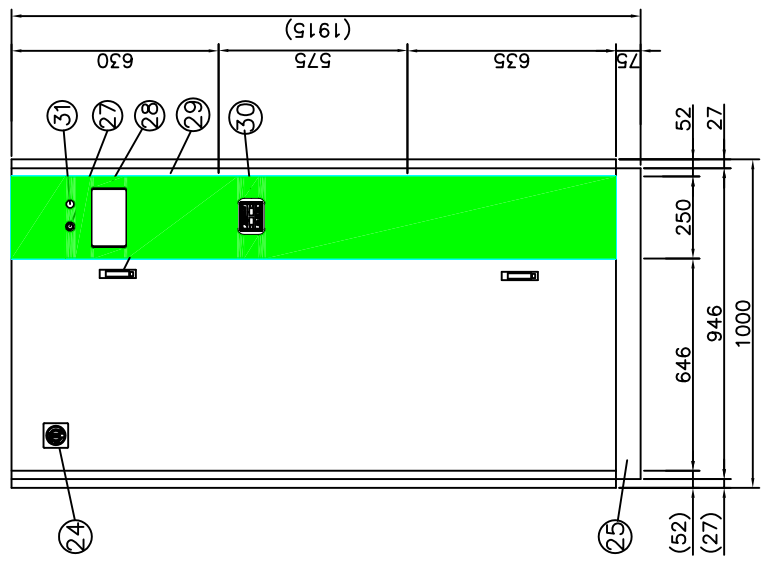

SPECIFICATION	
SPEC MODEL	RMT-1259-IX
COOLING CAPACITY	24,100 kcal/h (28.02 kW) 20,000 kcal/h (23.2 kW)
BLOWER MOTOR	VOLUME 80 CMM / 60 CMM (60/50HZ) TYPE SIROCCO AS-133D MOTOR 3 PH/50 Hz/0.75 kW x 8 P TYPE HERMETIC
COMPRESSOR	CAPACITY 3 PH/50 Hz/6 kW TYPE MULTI-PASS CROSS FINNED TUBE SPEC -
EVAPORATOR	CAPACITY 10,320 Kcal/h (12 kW) TYPE SUS-AERO FINNED TUBE TYPE STEP 3 kW x 4 STEP
HEATER	CAPACITY 8 L/h TYPE ELECTRODE STEP 6.1 kW
HUMIDIFIER	TYPE VINYL CHLORIDE + POLYESTER 20
AIR FILTER	SIZE 705 x 840 x 1EA
FRAME SIZE	1000 x 870 x 1915
REFRIGERANT	R-22 / R407C

NO	PART NAME	DESCRIPTION	QTY	SAFETY
01	COMPRESSOR	-	1	SAFETY
02	SERVICE VALVE	25.4 mm, 19.05 mm	2	SAFETY
03	BLOWER MOTOR	SGCC	1	SAFETY
04	BLOWER MOTOR	-	1	SAFETY
05	EVAPORATOR	CU + AL	1	SAFETY
06	EXPANSION VALVE	7.5 R/T	1	SAFETY
07	ELECTRIC HEATER	STS	1	SAFETY
08	RECEIVER TANK	ST12	1	SAFETY
09	HUMIDIFIER	-	1	SAFETY
10	CONTROL BOX	CR SHEET 1.6t	1	SAFETY
11	-	-	1	SAFETY
12	L.T.C	-	1	SAFETY
13	SENSOR	TEMP_HUMID	1	SAFETY
14	SUCTION STRAINER	28.57 mm	1	SAFETY
15	FILTER DRIER	12.7 mm	1	SAFETY
16	SIGHT GLASS	12.7 mm	1	SAFETY
17	SOLENOID VALVE(R)	12.7 mm	1	SAFETY
18	FRAME	CR SHEET 1.6t	1	SAFETY
19	CASE	CR SHEET 1.2t	1	SAFETY
20	INSULATION	PU FOAM 25t	1	SAFETY
21	DRAIN PLATE	SUS304	1	SAFETY
22	SOLENOID VALVE(W)	6.35 mm	1	SAFETY
23	MIDDLE VALVE(W)	6.35 mm	1	SAFETY
24	D-HANDLE	-	1	SAFETY
25	BASE FRAME	CR SHEET 1.6t	1	SAFETY
26	AIR FILTER	-	1	SAFETY
27	EMERGENCY SWITCH	-	1	SAFETY
28	CONTROL MONITOR	-	1	SAFETY
29	PUSH BUTTON	-	2	SAFETY
30	DIGIPRESSURE SWITCH	HIGH,LOW,DIFF	1	SAFETY
31	PUSH BUTTON SWITCH	-	1	SAFETY

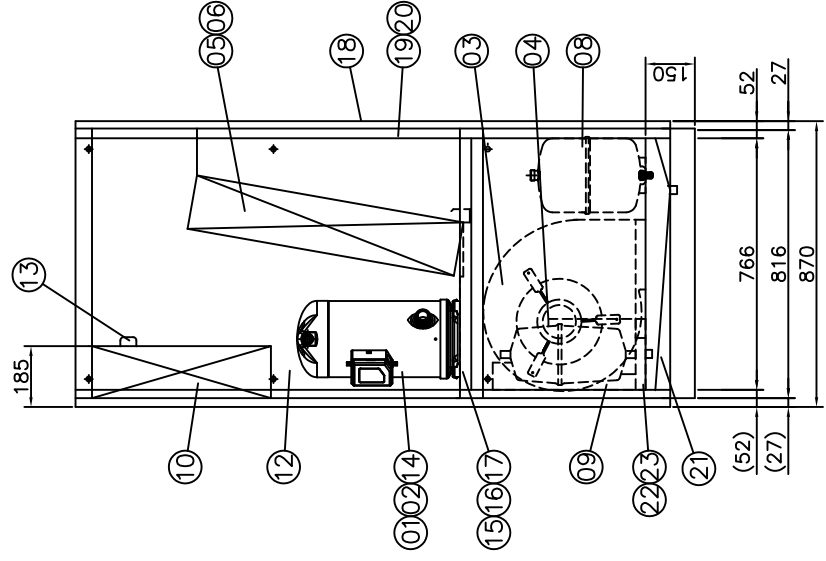

DATE:	2009. 01. 01
FILE NAME:	RMT-1259-IX
DWG NO:	
DRAWING GRADE :	GRADE 2
REQUEST NO :	00-000
LEGEND:	

APPROVED	
CHECKED	
DESIGNED	
DRAWING	

REV	DATE	DESCRIPTION	REVIEWED	CHECKED
A				
A				