

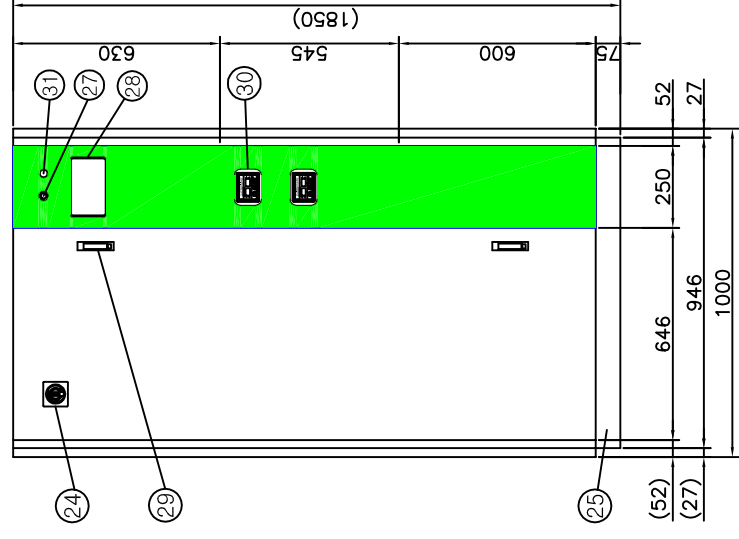


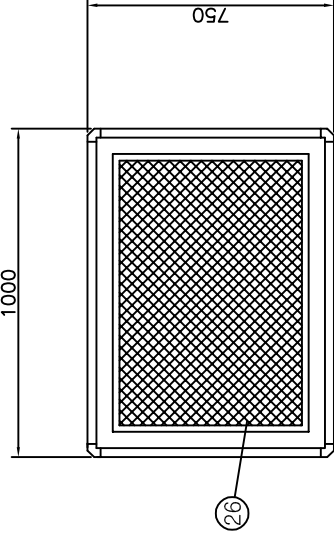

SPECIFICATION	
SPEC\MODEL	RMD-2128-IX
COOLING CAPACITY	60Hz 12.500 kcal/h (14.54 kW) 50Hz 10.180 kcal/h (11.84 kW)
BLOWER MOTOR	VOLUME 40 CMH / 30 CMH (60/50 Hz) TYPE SIROCCO AS-111D MOTOR 3PH/50 Hz/0.4 kW x 8 P TYPE HERMETIC SCROLL COMPRESSOR CAPACITY 3 PH/50 Hz/1.49 kW x 2 EA TYPE MULTI-PASS CROSS FINNED TUBE EVAPORATOR SPEC - HEATER CAPACITY 2.580 kcal/h (3 kW) TYPE SUS-AERO FINNED TUBE TYPE STEP 1.5 kW x 2 STEP HUMIDIFIER CAPACITY 4 L/h TYPE ELECTRODE STEP 3 kW TYPE VINYL CHLORIDE + POLYESTER 20t AIR FILTER SIZE 840 x 590 x 1EA FRAME SIZE 1000 x 750 x 1850 REFRIGERANT R-22 / R407C

PROJECT TITLE:	ECOSO GMBH
DRAWING TITLE:	CONSTANT TEMPERATURE & HUMIDITY EQUIPMENT (4HP-2CYCLE)
SCALE:	S / N
DATE:	2010. 03. 15
FILE NAME:	
RMD-2128-IX	
DWG NO.:	
DRAWING GRADE :	GRADE 2
REQUEST NO. :	
LEGEND:	
APPROVED	
CHECKED	
DESIGNED	
DRAWING	

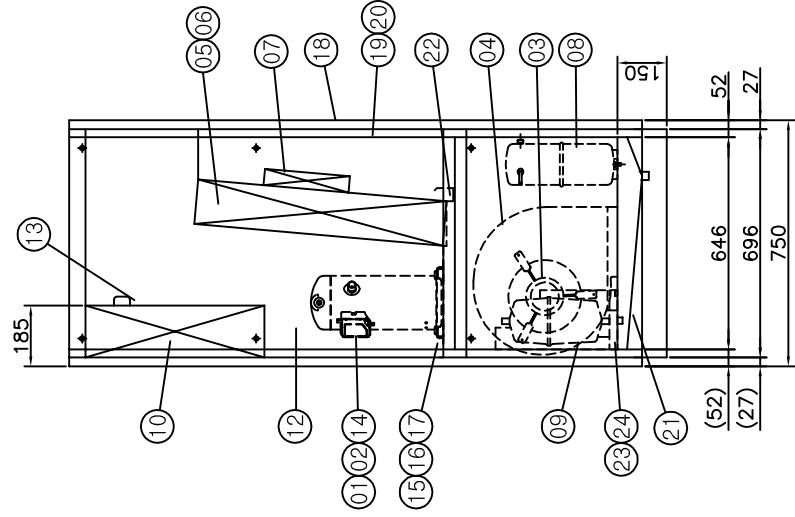

NO	PART NAME	DESCRIPTION	Q'TY	SAFETY
01	COMPRESSOR	-	2	SAFETY
02	SERVICE VALVE	12.70 mm, 15.87 mm	4	SAFETY
03	BLOWER	SGCC	1	SAFETY
04	BLOWER MOTOR	-	1	SAFETY
05	EVAPORATOR	CU + AL	1	SAFETY
06	EXPANSION VALVE	3R/T	2	SAFETY
07	ELECTRIC HEATER	STS	1	SAFETY
08	RECEIVER TANK	ST12	2	SAFETY
09	HUMIDIFIER	-	1	SAFETY
10	CONTROL BOX	CR SHEET 1.6t	1	SAFETY
11	-	-	1	SAFETY
12	L.T.C	-	2	SAFETY
13	SENSOR	TEMP. HUMID	1	SAFETY
14	SUCTION STRAINER	15.87 mm	2	SAFETY
15	FILTER DRIER	9.52 mm	2	SAFETY
16	SIGHT GLASS	9.52 mm	2	SAFETY
17	SOLENOID VALVE(R)	9.52 mm	2	SAFETY
18	FRAME	CR SHEET 1.6t	1	SAFETY
19	CASE	CR SHEET 1.2t	1	SAFETY
20	INSULATION	PU FOAM 25t	1	SAFETY
21	DRAIN PLATE	SUS304	1	SAFETY
22	SOLENOID VALVE(W)	6.35 mm	1	SAFETY
23	MIDDLE VALVE(W)	6.35 mm	1	SAFETY
24	D-HANDLE	-	1	SAFETY
25	BASE FRAME	CR SHEET 1.6t	1	SAFETY
26	AIR FILTER	-	1	SAFETY
27	EMERGENCY SWITCH	-	1	SAFETY
28	CONTROL MONITOR	-	1	SAFETY
29	PUSH BUTTON	-	2	SAFETY
30	DIGIPRESSURE SWITCH	HIGH,LOW,DIFF	2	SAFETY
31	PUSH BUTTON SWITCH	-	1	SAFETY

REV	DATE	DESCRIPTION	REVIEWED	CHECKED
Δ				
Δ				