




SPEC\MODEL		RMT-1159-IX
COOLING CAPACITY		15,600 kcal/h (18.13 kW) 12,800 kcal/h (14.8 kW)
BLOWER MOTOR		VOLUME 55 CMM / 45 CMM (60/50HZ) TYPE SIROCCO AS-111D MOTOR 3 PH/50/60 Hz/0.75 kW x 6 P TYPE HERMETIC SCROLL CAPACITY 3 PH/50 Hz/3.79 kW
COMPRESSOR		TYPE MULTI-PASS CROSS FINNED TUBE SPEC -
EVAPORATOR		CAPACITY 6.020 kcal/h (7 kW) TYPE SUS-AERO FINNED TUBE STEP 2.34 kW x 3 STEP
HEATER		CAPACITY 4 L/h TYPE ELECTRODE STEP 3 kW
HUMIDIFIER		TYPE VINYL CHLORIDE + POLYESTER 20
AIR FILTER		SIZE 920 x 390 x 1EA
FRAME SIZE		900 x 800 x 2050
REFRIGERANT		R-22 / R407C

DRAWING TITLE:		ECOSO GMBH
DRAWING TITLE:		CONSTANT TEMPERATURE & HUMIDITY EQUIPMENT (SHP-101CYCLE)
SCALE:		S / N
DATE:		
FILE NAME:		RMT-1159-IX
DWG NO:		
DRAWING GRADE :		GRADE 2
REQUEST NO :		00-000
LEGEND:		

NO	PART NAME	DESCRIPTION	QTY	SAFETY
01	COMPRESSOR	-	1	SAFETY
02	SERVICE VALVE	19.05mm,15.87mm	2	SAFETY
03	BLOWER MOTOR	SGCC	1	SAFETY
04	EVAPORATOR	CU + AL	1	SAFETY
05	EXPANSION VALVE	5R/T	1	SAFETY
06	ELECTRIC HEATER	STS	1	SAFETY
07	RECEIVER TANK	ST12	1	SAFETY
08	HUMIDIFIER	CR SHEET 1.6t	1	SAFETY
09	CONTROL_BOX	-	1	SAFETY
10	-	-	1	SAFETY
11	L.T.C	-	1	SAFETY
12	SENSOR	TEMP.HUMID	1	SAFETY
13	SUCTION STRAINER	19.05 mm	1	SAFETY
14	FILTER DRIER	12.70 mm	1	SAFETY
15	SIGHT GLASS	12.70 mm	1	SAFETY
16	SOLENOID VALVE(R)	12.70 mm	1	SAFETY
17	FRAME	CR SHEET 1.6t	1	SAFETY
18	CASE	CR SHEET 1.2t	1	SAFETY
19	INSULATION	PU FOAM 25t	1	SAFETY
20	DRAIN PLATE	SUS304	1	SAFETY
21	SOLENOID VALVE(W)	6.35 mm	1	SAFETY
22	MIDDLE VALVE(W)	6.35 mm	1	SAFETY
23	D-HANDLE	-	1	SAFETY
24	BASE FRAME	CR SHEET 1.6t	1	SAFETY
25	AIR FILTER	"AL"	1	SAFETY
26	CONTROL MONITOR	-	1	SAFETY
27	PUSH BUTTON	-	2	SAFETY
28	DIGIPRESSURE SWITCH	HIGH-LOW-DIFF	1	SAFETY
29	FRONT CASE	PUNCHING PLATE	1	SAFETY
30	EMERGENCY SWITCH	-	1	SAFETY
31	PUSH BUTTON SWITCH	-	1	SAFETY

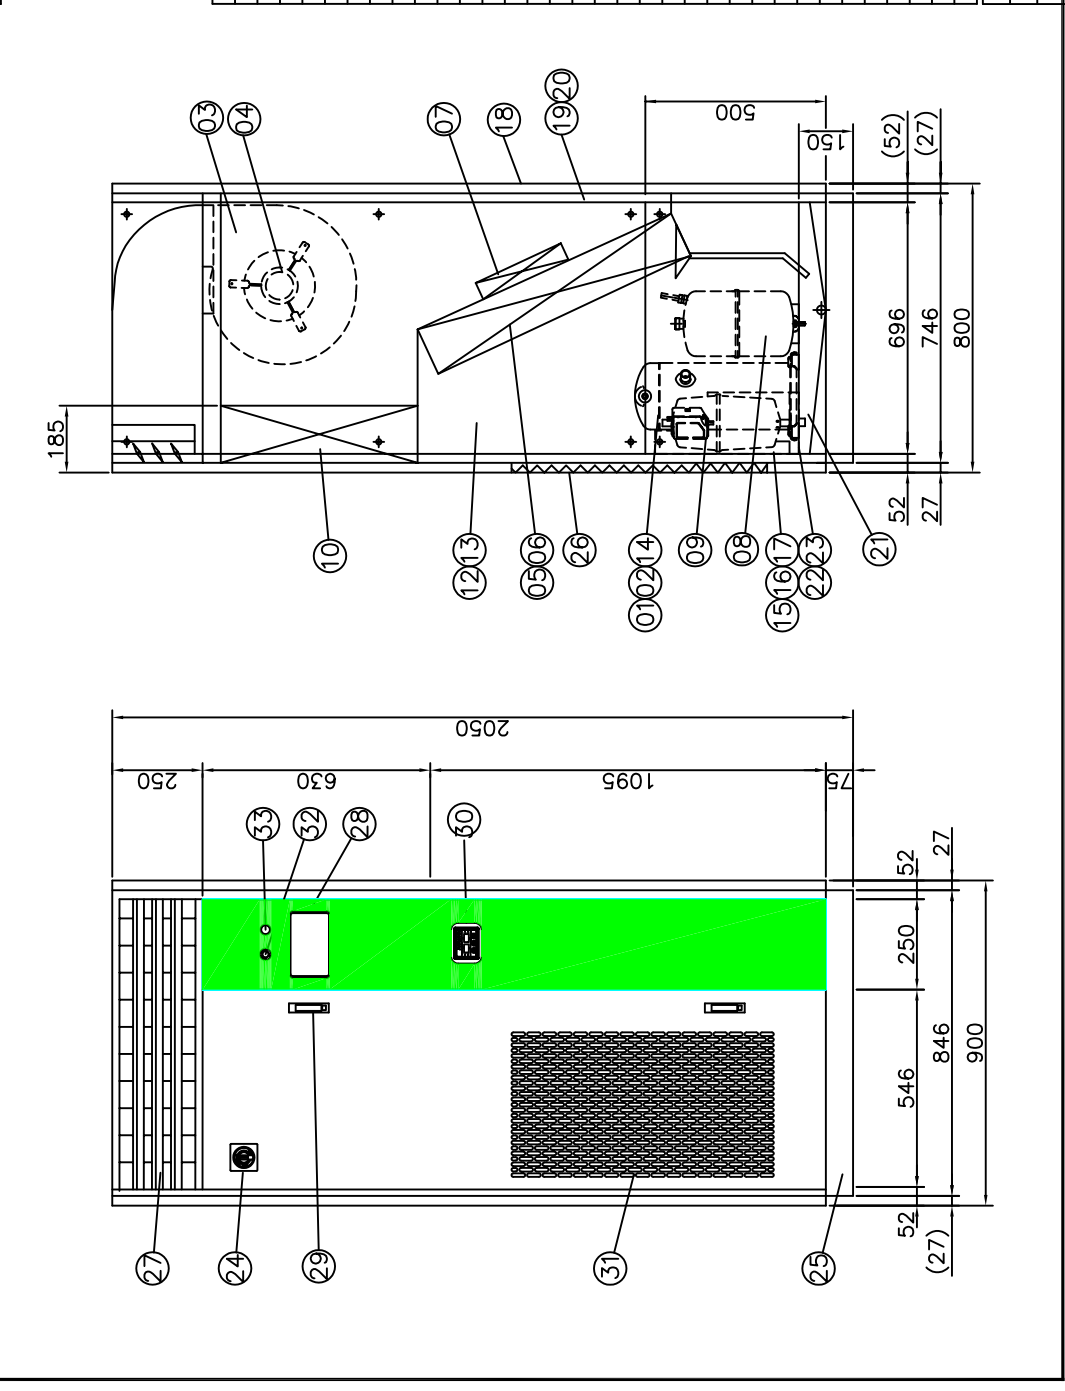

REV	DATE	DESCRIPTION	REVIEWED	CHECKED