




SPECIFICATION	
SPEC MODEL	RMT-1259-IX
COOLING CAPACITY	24,100 kcal/h (28.02 kW) 50Hz 20,000 kcal/h (23.2 kW)
BLOWER MOTOR	VOLUME 80 CMM / 60 CMM (60/50HZ) TYPE SIROCCO AS-133D MOTOR 3 PH/50/60 Hz/0.75 kW x 8 P TYPE HERMETIC
COMPRESSOR	CAPACITY 3 PH/50/60 Hz/6 kW TYPE MULTI-PASS CROSS FINNED TUBE SPEC -
EVAPORATOR	CAPACITY 10,320 Kcal/h (12 kW) TYPE SUS-AERO FINNED TUBE TYPE STEP 3 kW x 4 STEP
HEATER	CAPACITY 8 L/h TYPE ELECTRODE STEP 6.1 kW
HUMIDIFIER	TYPE VINYL CHLORIDE + POLYESTER 20 SIZE 490 x 920 x 1EA
AIR FILTER	SIZE 1000 x 870 x 2050
FRAME SIZE	R-22 / R407C
REFRIGERANT	

PROJECT TITLE:	ECSO GMBH
DRAWING TITLE:	CONSTANT TEMPERATURE & HUMIDITY EQUIPMENT (7.5HP-1CYCLE)
SCALE:	S / N
DATE:	
FILE NAME:	RMT-1259-IX
DWG NO:	
DRAWING GRADE :	GRADE 2
REQUEST NO :	00-000
LEGEND:	

NO	PART NAME	DESCRIPTION	Q'TY	SAFETY
01	COMPRESSOR	-	1	<SAFETY>
02	SERVICE VALVE	25.4 mm,19.05 mm	2	<SAFETY>
03	BLOWER MOTOR	SGCC	1	<SAFETY>
04	BLOWER MOTOR	-	1	<SAFETY>
05	EVAPORATOR	CU + AL	1	<SAFETY>
06	EXPANSION VALVE	7.5R/T	1	<SAFETY>
07	ELECTRIC HEATER	STS	1	<SAFETY>
08	RECEIVER TANK	ST12	1	<SAFETY>
09	HUMIDIFIER	-	1	<SAFETY>
10	CONTROL BOX	CR SHEET 1.6t	1	<SAFETY>
11	-	-	1	<SAFETY>
12	L.T.C	-	1	<SAFETY>
13	SENSOR	TEMP.HUMID	1	<SAFETY>
14	SUCTION STRAINER	28.57 mm	1	<SAFETY>
15	FILTER DRIER	12.70 mm	1	<SAFETY>
16	SIGHT GLASS	12.70 mm	1	<SAFETY>
17	SOLENOID VALVE(R)	12.70 mm	1	<SAFETY>
18	FRAME	CR SHEET 1.6t	1	<SAFETY>
19	CASE	CR SHEET 1.2t	1	<SAFETY>
20	INSULATION	PU FOAM 25t	1	<SAFETY>
21	DRAIN PLATE	SUS304	1	<SAFETY>
22	SOLENOID VALVE(W)	6.35 mm	1	<SAFETY>
23	MIDDLE VALVE(W)	6.35 mm	1	<SAFETY>
24	D-HANDLE	-	1	<SAFETY>
25	BASE FRAME	CR SHEET 1.6t	1	<SAFETY>
26	AIR FILTER	-	1	<SAFETY>
27	AIR GRILL	"AL"	1	<SAFETY>
28	CONTROL MONITOR	-	1	<SAFETY>
29	PUSH BUTTON	-	2	<SAFETY>
30	DIGIPRESSURE SWITCH	HIGH,LOW,DIFF	1	<SAFETY>
31	EMERGENCY SWITCH	-	1	<SAFETY>
32	PUSH BUTTON SWITCH	-	1	<SAFETY>
33	FRONT CASE	PUNCHING PLATE	1	<SAFETY>

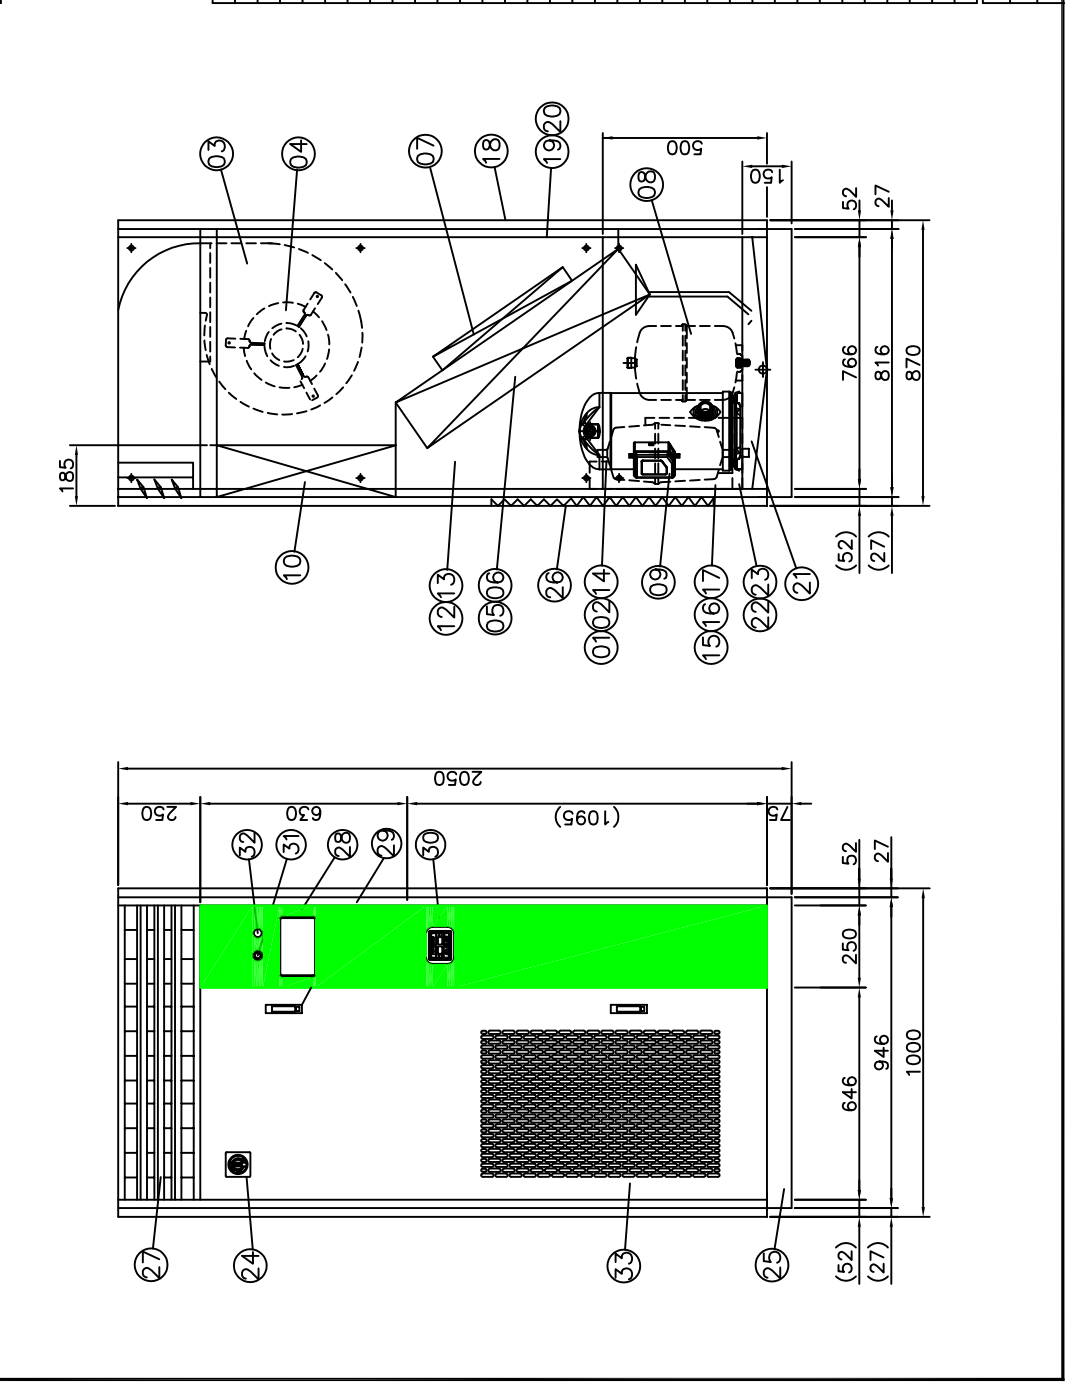

APPROVED	
CHECKED	
DESIGNED	
DRAWING	