




SPECIFICATION	
SPEC. MODEL	RMT-1340-IX
COOLING CAPACITY	31,900 kcal/h (37.09 kW) 26,400 kcal/h (30.7 kW)
BLOWER MOTOR	VOLUME 110 CMH / 85 CMH (60/50 Hz) TYPE SIROCCO AS-1512D MOTOR 3 PH/50 Hz/1.12 kW x 8 P TYPE HERMETIC SCROLL CAPACITY 3 PH/50 Hz/7.5 kW TYPE MULTI-PASS CROSS FINNED TUBE SPEC -
COMPRESSOR	CAPACITY 12,900 kcal/h (15 kW) TYPE SUS-AERO FINNED TUBE TYPE STEP 3.75 kW x 4 STEP
EVAPORATOR	CAPACITY 8 L/h TYPE ELECTRODE STEP 6.1 kW
HEATER	TYPE VINYL CHLORIDE + POLYESTER 20t SIZE 900 x 690 x 1EA
HUMIDIFIER	TYPE 1146 x 846 x 1950 REFRIGERANT R-22 / R-407C

PROJECT TITLE:	ECISO GMBH
DRAWING TITLE:	CONSTANT TEMPERATURE & HUMIDITY EQUIPMENT (10HP-1CYCLE)
SCALE:	S / N
DATE:	2009. 01. 01
FILE NAME:	RMT-1340-IX
DWG NO:	
DRAWING GRADE :	GRADE 2
REQUEST NO :	00-000
LEGEND:	

NO	PART NAME	DESCRIPTION	Q'TY	SAFETY
01	COMPRESSOR	-	1	SAFE
02	SERVICE VALVE	25.4 mm,19.05 mm	2	SAFE
03	BLOWER MOTOR	SGCC	1	SAFE
04	EVAPORATOR	CU + AL	1	SAFE
05	EXPANSION VALVE	10 R/T	1	SAFE
06	ELECTRIC HEATER	SIS	1	SAFE
07	RECEIVER TANK	ST12	1	SAFE
08	HUMIDIFIER	-	1	SAFE
09	CONTROL_BOX	CR SHEET 1.6t	1	SAFE
10	-	-	1	SAFE
11	L.T.C	-	1	SAFE
12	SENSOR	TEMP.HUMID	1	SAFE
13	SUCTION STRAINER	28.57 mm	1	SAFE
14	FILTER DRIER	15.87 mm	1	SAFE
15	SIGHT GLASS	15.87 mm	1	SAFE
16	SOLENOID VALVE(R)	15.87 mm	1	SAFE
17	FRAME	CR SHEET 2.3t	1	SAFE
18	CASE	PU FOAM 25t	1	SAFE
19	INSULATION	SUS304	1	SAFE
20	DRAIN PLATE	6.35 mm	1	SAFE
21	SOLENOID VALVE(W)	6.35 mm	1	SAFE
22	MIDDLE VALVE(W)	6.35 mm	1	SAFE
23	D-HANDLE	-	1	SAFE
24	BASE FRAME	CR SHEET 2.3t	2	SAFE
25	AIR FILTER	"AL"	1	SAFE
26	CONTROL MONITOR	-	1	SAFE
27	PUSH BUTTON	-	2	SAFE
28	DIGIPRESSURE SWITCH	HIGH-LOW.DIFF	1	SAFE
29	EMERGENCY SWITCH	-	1	SAFE
30	PUSH BUTTON SWITCH	-	1	SAFE
31	FRONT CASE	PUNCHING PLATE	1	SAFE

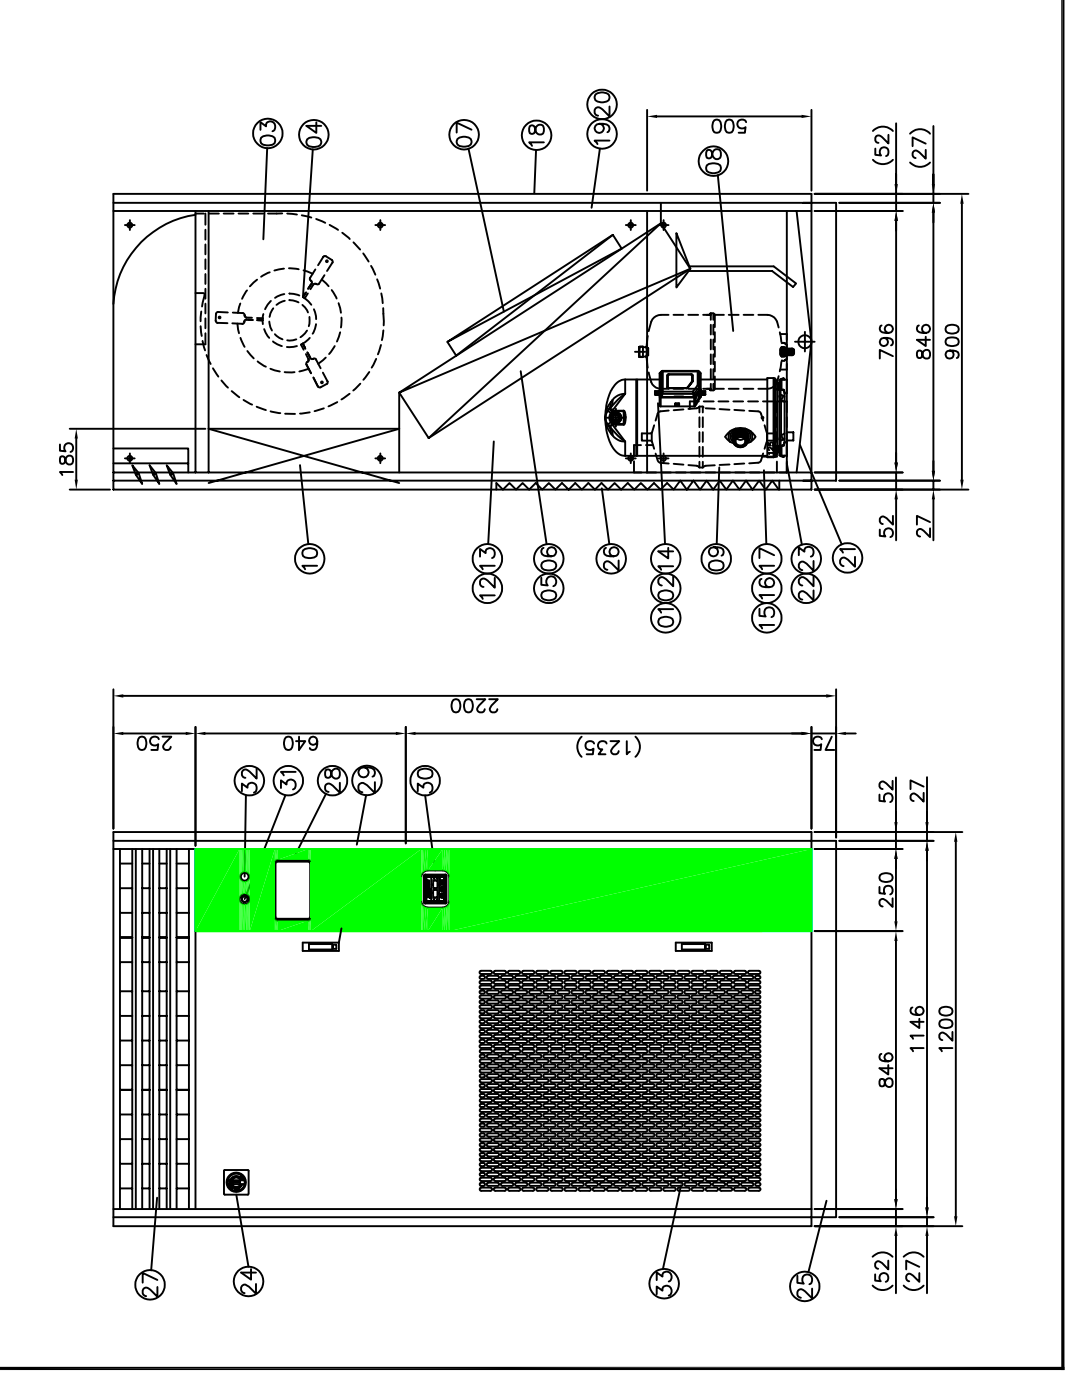

REV	DATE	DESCRIPTION	REVIEWED	CHECKED