






SPECIFICATION	
SPEC. MODEL	RMT-2496-IX
COOLING CAPACITY	60 Hz 48,200 kcal/h (56.04 kW) 50 Hz 40,000 kcal/h (46.4 kW)
VOLUME	160 CMM / 120 CMM (60/50 Hz)
BLOWER MOTOR TYPE	SIROCCO AS-133D
MOTOR TYPE	3 PH/50 Hz/0.75 kW x 8 P x 2 EA
HERMETIC SCROLL TYPE	3 PH/50 Hz/6 kW x 2 EA
COMPRESSOR TYPE	HERMETIC SCROLL
EVAPORATOR TYPE	3 PH/50 Hz/6 kW x 2 EA
SPEC	MULTI-PASS CROSS FINNED TUBE
CAPACITY	17,200 kcal/h (20 kW)
HEATER TYPE	SUS-AERO FINNED TUBE TYPE
STEP	5 kW x 4 STEP
CAPACITY	13 L/h
HUMIDIFIER TYPE	ELECTRODE
STEP	9.9 kW
AIR FILTER TYPE	VINYL CHLORIDE + POLYESTER 20t
SIZE	1025 x 570 x 2EA
FRAME SIZE	1746 x 816 x 1900
REFRIGERANT	R-22 / R407C

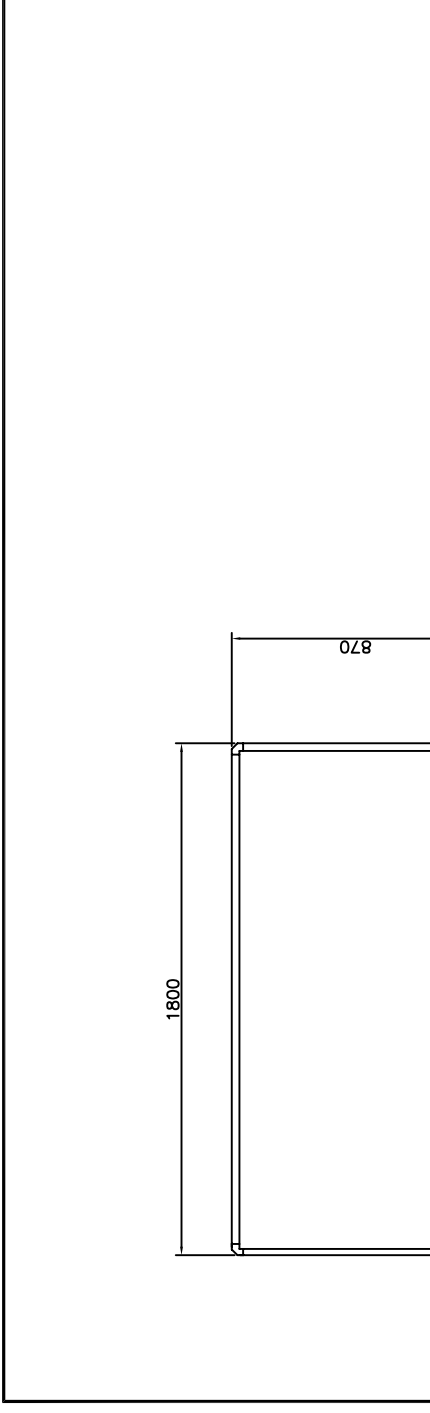

PROJECT TITLE:	ECOSO GMBH
DRAWING TITLE:	CONSTANT TEMPERATURE & HUMIDITY EQUIPMENT 15HP(7.5HPx2CYCLE)
SCALE:	S / N
DATE:	2009. 01. 01
FILE NAME:	RMT-2496-IX
DWG NO:	
DRAWING GRADE :	GRADE 2
REQUEST NO :	00-000
LEGEND:	

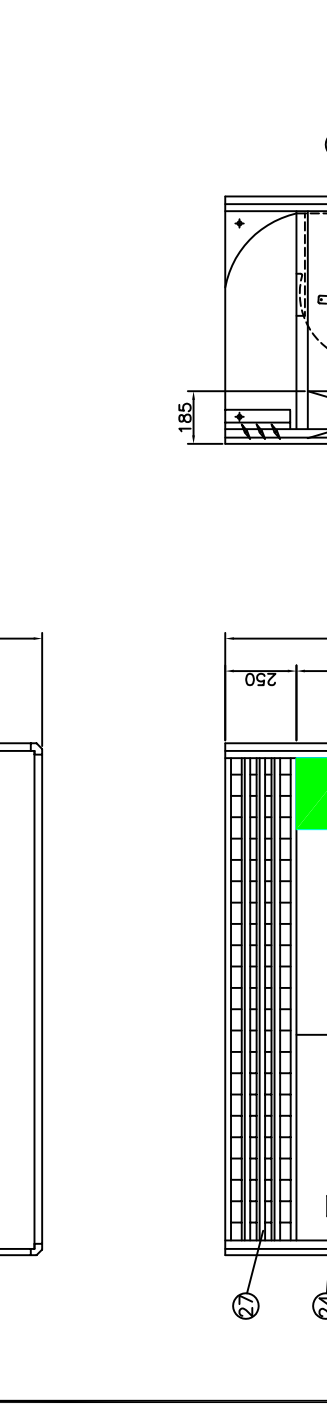

NO	PART NAME	DESCRIPTION	QTY	SAFETY
01	COMPRESSOR	-	2	SECRET
02	SERVICE VALVE	25.4 mm, 19.05 mm	4	SECRET
03	BLOWER MOTOR	SGCC	2	SECRET
04	EVAPORATOR	CU + AL	1	SECRET
05	EXPANSION VALVE	7.5 R/T	2	SECRET
07	ELECTRIC HEATER	STS	1	SECRET
08	RECEIVER TANK	ST12	2	SECRET
09	HUMIDIFIER	-	1	SECRET
10	CONTROL BOX	CR SHEET 1.6t	1	SECRET
11	-	-	1	SECRET
12	L.T.C	-	2	SECRET
13	SENSOR	TEMP.HUMID	1	SECRET
14	SUCTION STRAINER	28.57 mm	2	SECRET
15	FILTER DRIER	12.70 mm	2	SECRET
16	SIGHT GLASS	12.70 mm	2	SECRET
17	SOLENOID VALVE(R)	12.70 mm	2	SECRET
18	FRAME	CR SHEET 2.3t		
19	CASE	CR SHEET 1.2t		
20	INSULATION	PU FOAM 25t		
21	DRAIN PLATE	SUS304	1	
22	SOLENOID VALVE(W)	6.35 mm	1	SECRET
23	MIDDLE VALVE(W)	6.35 mm	1	SECRET
24	D-HANDLE	-	1	
25	BASE FRAME	CR SHEET 2.3t	2	
26	AIR FILTER	-	2	
27	AIR GRILL	"AL"	1	SECRET
28	CONTROL MONITOR	-	1	
29	PUSH BUTTON	-	2	
30	DIGIPRESSURE SWITCH	HIGH,LOW,DIFF	2	
31	EMERGENCY SWITCH	-	1	
32	PUSH BUTTON SWITCH	-	1	
33	FRONT CASE	PUNCHING PLATE	1	

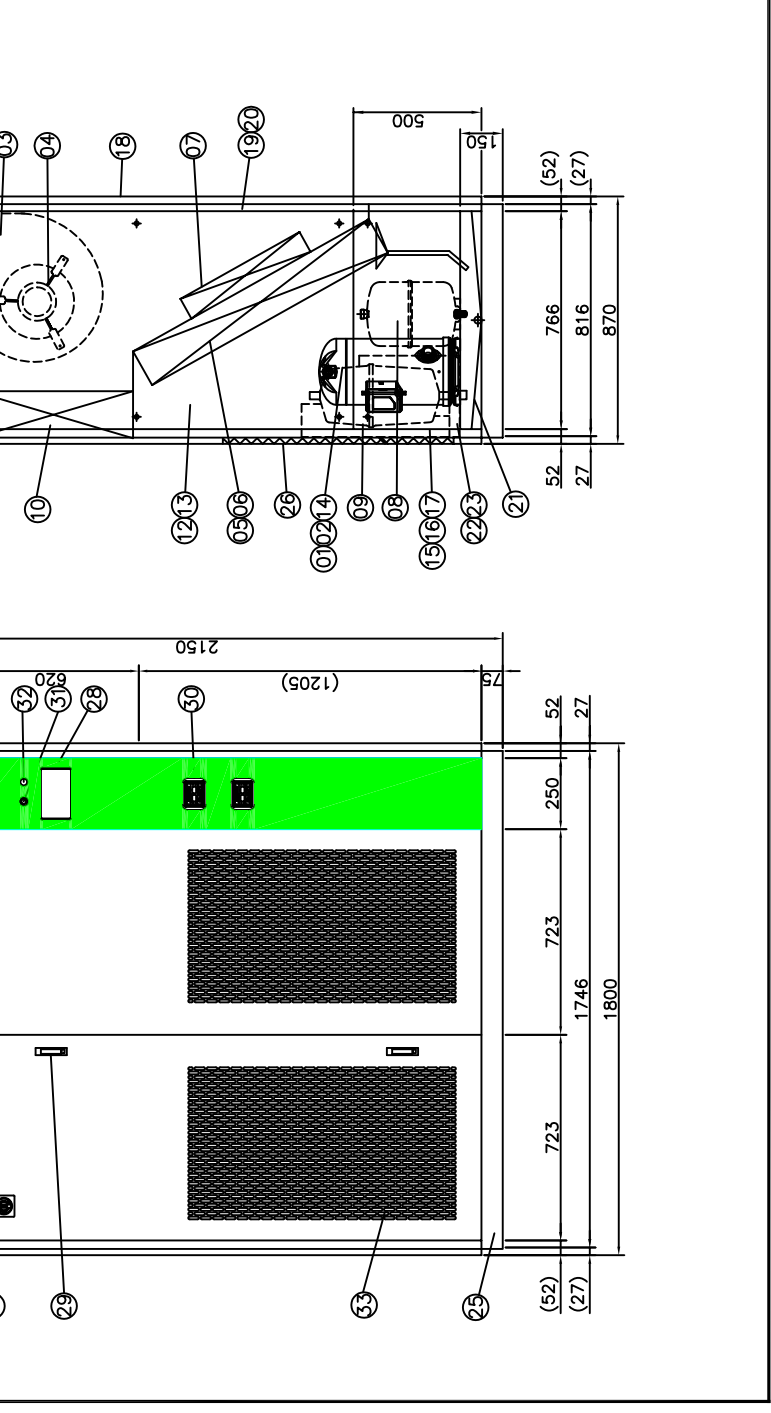

REV	DATE	DESCRIPTION	REVIEWED	CHECKED
Δ				
Δ				