




SPECIFICATION	
SPEC\MODEL	RMT-2128-IX
COOLING CAPACITY	12.500 kcal/h (14.54 kW) 10.180 kcal/h (11.84 kW)
BLOWER MOTOR	VOLUME 40 CMM / 30 CMM (60/50 Hz) TYPE SIROCCO AS-111D MOTOR 3PH/50 Hz/0.4 kW x 8 P TYPE HERMETIC SCROLL COMPRESSOR 3 PH/50 Hz/1.49 kW x 2 EA EVAPORATOR MULTI-PASS CROSS FINNED TUBE HEATER 2.580 kcal/h (3 kW) TYPE SUS-AERO FINNED TUBE HUMIDIFIER CAPACITY 4 L/h TYPE ELECTRODE STEP 3 kW AIR FILTER TYPE VINYL CHLORIDE + POLYESTER 20 FRAME SIZE 1000 x 750 x 2050 REFRIGERANT R-22 / R407C

NO	PART NAME	DESCRIPTION	Q'TY	SAFETY
01	COMPRESSOR	-	2	SAFETY
02	SERVICE VALVE	12.7 mm, 15.87 mm	4	SAFETY
03	BLOWER MOTOR	S6CC	1	SAFETY
04	BLOWER MOTOR	CU + AL	1	SAFETY
05	EVAPORATOR	3R/T	2	SAFETY
06	EXPANSION VALVE	SIS	1	SAFETY
07	ELECTRIC HEATER	ST12	2	SAFETY
08	RECEIVER TANK	-	1	SAFETY
09	HUMIDIFIER	CR SHEET 1.6t	1	SAFETY
10	CONTROL BOX	-	1	SAFETY
11	-	-	2	SAFETY
12	L.T.C	-	1	SAFETY
13	SENSOR	TEMP.HUMID	2	SAFETY
14	SUCTION STRAINER	15.87 mm	2	SAFETY
15	FILTER DRIER	9.52 mm	2	SAFETY
16	SIGHT GLASS	9.52 mm	2	SAFETY
17	SOLENOID VALVE(R)	9.52 mm	2	SAFETY
18	FRAME	CR SHEET 1.6t	1	SAFETY
19	CASE	CR SHEET 1.2t	1	SAFETY
20	INSULATION	PU FOAM 25t	1	SAFETY
21	DRAIN PLATE	SUS304	1	SAFETY
22	SOLENOID VALVE(W)	6.35 mm	1	SAFETY
23	NIDDLE VALVE(W)	6.35 mm	1	SAFETY
24	D-HANDLE	-	1	SAFETY
25	BASE FRAME	CR SHEET 1.6t	1	SAFETY
26	AIR FILTER	"AL"	1	SAFETY
27	AIR GRILL	-	1	SAFETY
28	CONTROL MONITOR	-	1	SAFETY
29	PUSH BUTTON	-	2	SAFETY
30	DIGIPRESSURE SWITCH	HIGH.LOW.DIFF	2	SAFETY
31	FRONT CASE	PUNCHING PLATE	1	SAFETY
32	EMERGENCY SWITCH	-	1	SAFETY
33	PUSH BUTTON SWITCH	-	1	SAFETY

REV	DATE	DESCRIPTION	REVIEWED	CHECKED
Δ				
Δ				

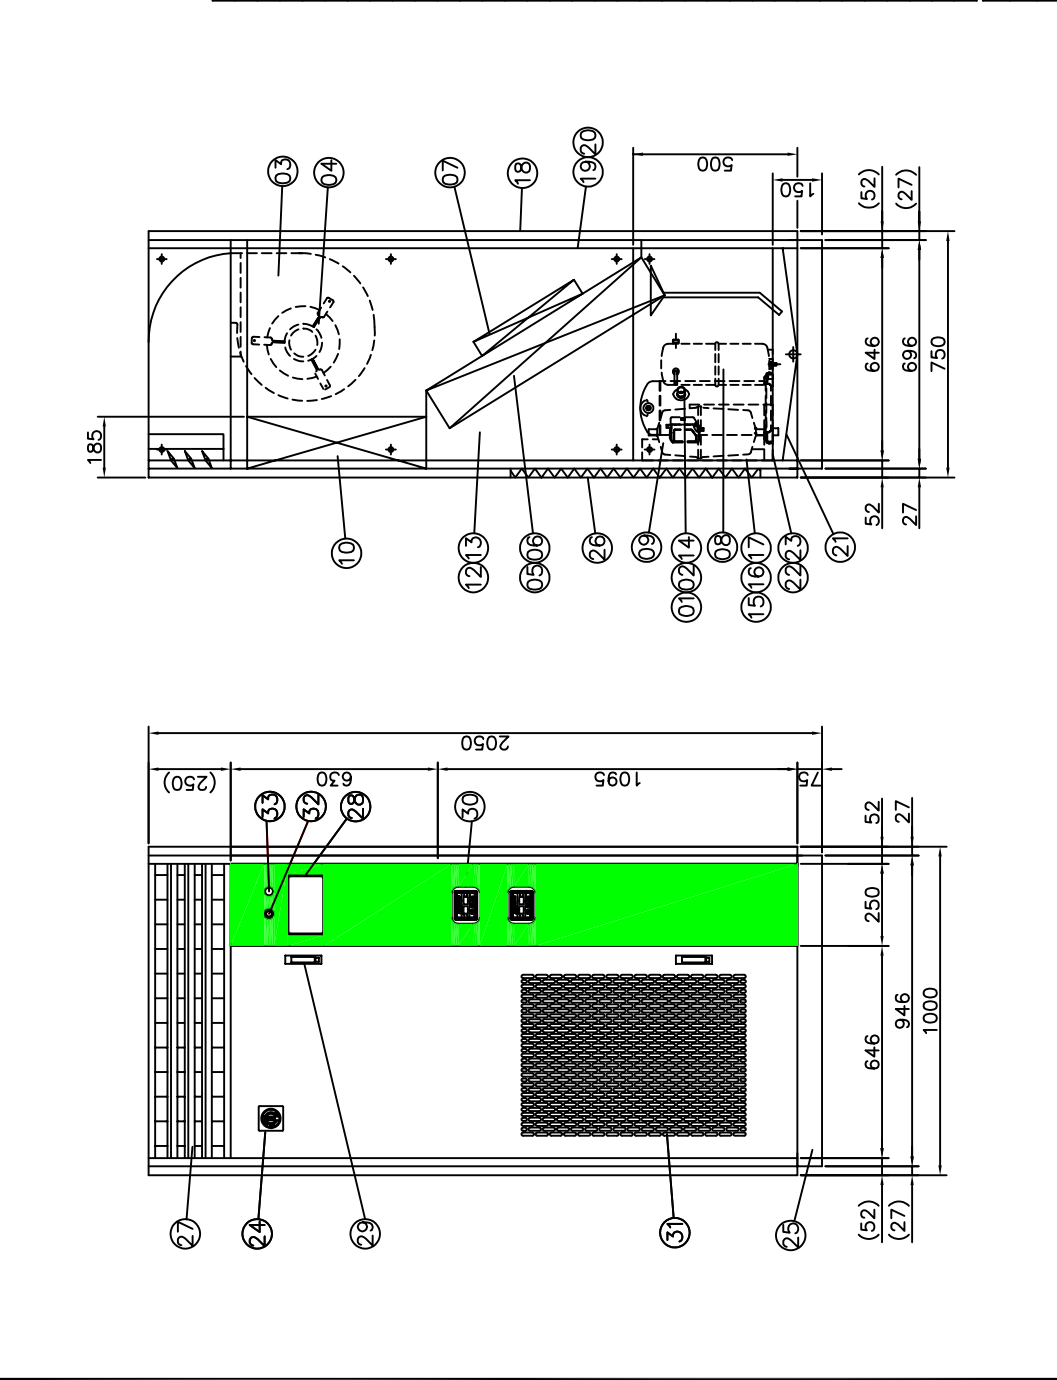

NO	PART NAME	DESCRIPTION	Q'TY	SAFETY
01	COMPRESSOR	-	2	SAFETY
02	SERVICE VALVE	12.7 mm, 15.87 mm	4	SAFETY
03	BLOWER MOTOR	S6CC	1	SAFETY
04	BLOWER MOTOR	CU + AL	1	SAFETY
05	EVAPORATOR	3R/T	2	SAFETY
06	EXPANSION VALVE	SIS	1	SAFETY
07	ELECTRIC HEATER	ST12	2	SAFETY
08	RECEIVER TANK	-	1	SAFETY
09	HUMIDIFIER	CR SHEET 1.6t	1	SAFETY
10	CONTROL BOX	-	1	SAFETY
11	-	-	2	SAFETY
12	L.T.C	-	1	SAFETY
13	SENSOR	TEMP.HUMID	2	SAFETY
14	SUCTION STRAINER	15.87 mm	2	SAFETY
15	FILTER DRIER	9.52 mm	2	SAFETY
16	SIGHT GLASS	9.52 mm	2	SAFETY
17	SOLENOID VALVE(R)	9.52 mm	2	SAFETY
18	FRAME	CR SHEET 1.6t	1	SAFETY
19	CASE	CR SHEET 1.2t	1	SAFETY
20	INSULATION	PU FOAM 25t	1	SAFETY
21	DRAIN PLATE	SUS304	1	SAFETY
22	SOLENOID VALVE(W)	6.35 mm	1	SAFETY
23	NIDDLE VALVE(W)	6.35 mm	1	SAFETY
24	D-HANDLE	-	1	SAFETY
25	BASE FRAME	CR SHEET 1.6t	1	SAFETY
26	AIR FILTER	"AL"	1	SAFETY
27	AIR GRILL	-	1	SAFETY
28	CONTROL MONITOR	-	1	SAFETY
29	PUSH BUTTON	-	2	SAFETY
30	DIGIPRESSURE SWITCH	HIGH.LOW.DIFF	2	SAFETY
31	FRONT CASE	PUNCHING PLATE	1	SAFETY
32	EMERGENCY SWITCH	-	1	SAFETY
33	PUSH BUTTON SWITCH	-	1	SAFETY